
LIGHT WALNUT





RECOMMENDED APPLICATIONS			
FLOORS & WALLS	SHOWER FLOORS & WALLS	EXTERIOR PAVING FREEZE THAW STABLE	
YES	YES	NOT TESTED	

TECHNICAL SPECIFICATIONS			
COMPRESSIVE STRENGTH	TENSILE STRENGTH	BULK DENSITY	
1153 kg/cm ²	148 kg/cm ²	2437 kg/m ³	

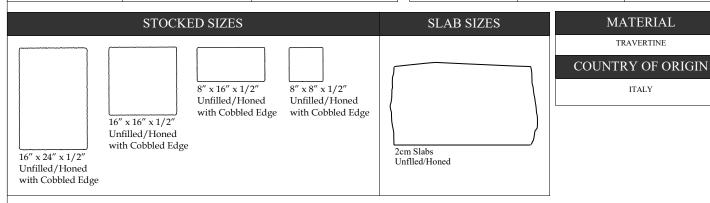

NOTES	RANGE	
OTHER SIZES OR FINISHES AVAILABLE VIA SPECIAL ORDER STONE IS A NATURAL PRODUCT. IT IS IMPERATIVE THAT YOU REQUEST JOB SAMPLES AND RANGE PICTURES FOR EVERY JOB		