

POMPIGNAN GREIGE

SP




RECOMMENDED APPLICATIONS

FLOORS & WALLS	SHOWER FLOORS & WALLS	EXTERIOR PAVING FREEZE THAW STABLE
YES	YES	YES

TECHNICAL SPECIFICATIONS

COMPRESSIVE STRENGTH	TENSILE STRENGTH	WATER ABSORPTION	BULK DENSITY
153 MPa	19.4 MPa	0.3%	2.68 T/m ³

STOCKED SIZES

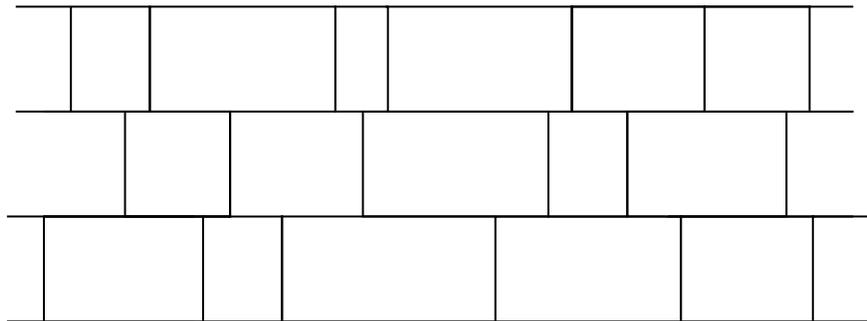

16" x Random Lengths x 2cm

MATERIAL

LIMESTONE

COUNTRY OF ORIGIN

FRANCE

NOTES

- FLAMED 2CM THICK MATERIAL IS APPROPRIATE FOR EXTERIOR USE
- LENGTHS RANGE FROM 8" TO 28" // SOLD BY THE PATTERN IN MULTIPLES OF 4.35SF
- OTHER SIZES OR FINISHES AVAILABLE VIA SPECIAL ORDER
- STONE IS A NATURAL PRODUCT. IT IS IMPERATIVE THAT YOU REQUEST JOB SAMPLES AND RANGE PICTURES FOR EVERY JOB

RANGE

